

TQLZ 系列振动清理筛

适用于粮食加工厂、粮食仓库的原粮清理。不同规格的筛面可清理小麦、稻谷、玉米、油料中大、小轻杂。它设有两层筛面，密封性好，对含大杂较多的粮食清理效果甚佳，还可用于食品、化工等行业的颗粒分离。


特点

- 结构紧凑、密封性好。
- 噪声小、能耗低。
- 运行平稳，清理效果好，生产效率高。
- 由于采用振动电机驱动，激振力大小、振动方向及筛体倾角可根据需要调节。

TQLZ series reciprocating separator is suitable for cleaning raw grain for grain processing plant and grain storage. The sieve of different specification can separate large, small and light impurities from wheat, paddy, corn and oil bearing materials. It is designed with doubledecker sieve, and good seal. It has much better effects especially for big impurities contained in grain. It is also used for granule separation in food and chemical industry.

Feature

- Compact construction, well seal .
- Low noise, low power consumption.
- Stable movement, well cleaning effect, higher production efficiency.
- Driven by vibrating motor , the vibrating force , vibrating direction and inclination of sieve cover can be adjusted according to the requirement.

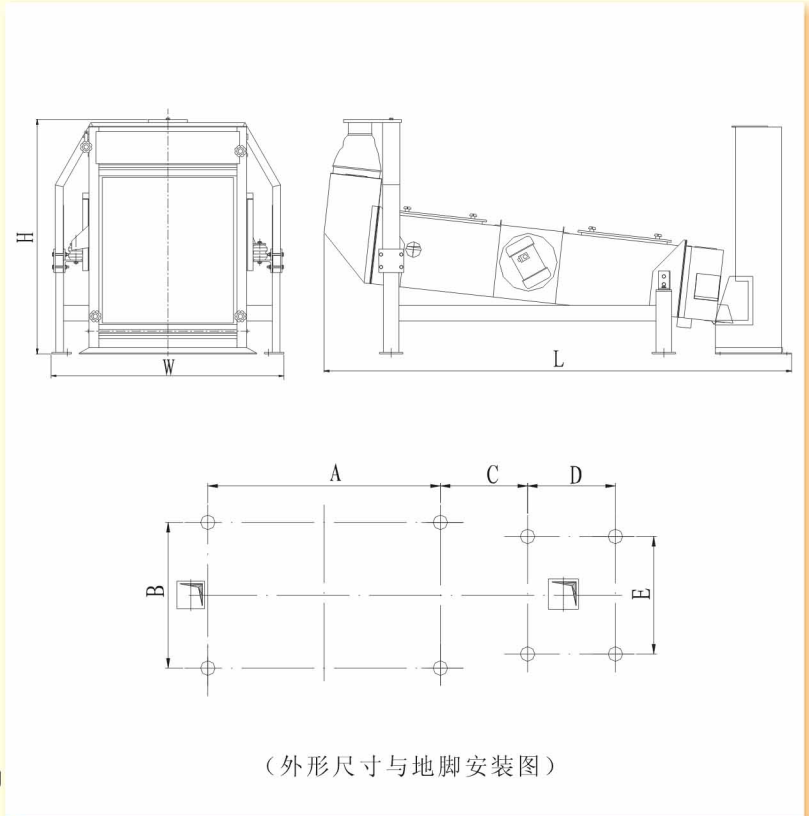

主要技术参数

型号	L	W	H	A	B	C	D	E
TQLZ150×200	2616	1995	1567	1680	1795	325	428	1581
TQLZ125×200	2703	1758	1512	1700	1558	340	428	1336
TQLZ100×200	2640	1486	1567	1746	1286	325	428	1076
TQLZ80×150	2455	1286	1450	1246	1136	352	373	876

型号	TQLZ150×200	TQLZ125×200	TQLZ100×200	TQLZ80×150
产量t/h	9~15	9~12	8~12	5~8
功率kW	2×0.75	2×0.75	2×0.38	2×0.2
风量m³/h	4800~7200	4500~2550	3600~4500	2600~3000
机重kg	1100	1000	900	650
主机外形mm	2616×1995×1567	2703×2324×1512	2640×1610×1550	2455×1286×1450

通过ISO9001国际标准质量体系认证

E-mail: yongxiangmiji@sohu.com <http://www.hbyxlj.com>

地址：湖北省安陆市府河大道8号

ADD: 8 FUHE AVE. ANLU CITY, HUBEI, CHINA

电话(TEL): 0712-5254443 5254445 5258762 传真(FAX): 0712-5254443 邮编(POSTCODE): 432600